THIS DRAWING IS THE PROPERTY OF BROWNELL LTD,AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DRG No
BL/D10375 INST

USED ON -------

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

THIRD ANGLE PROJECTION

DO NOT SCALE - ASK

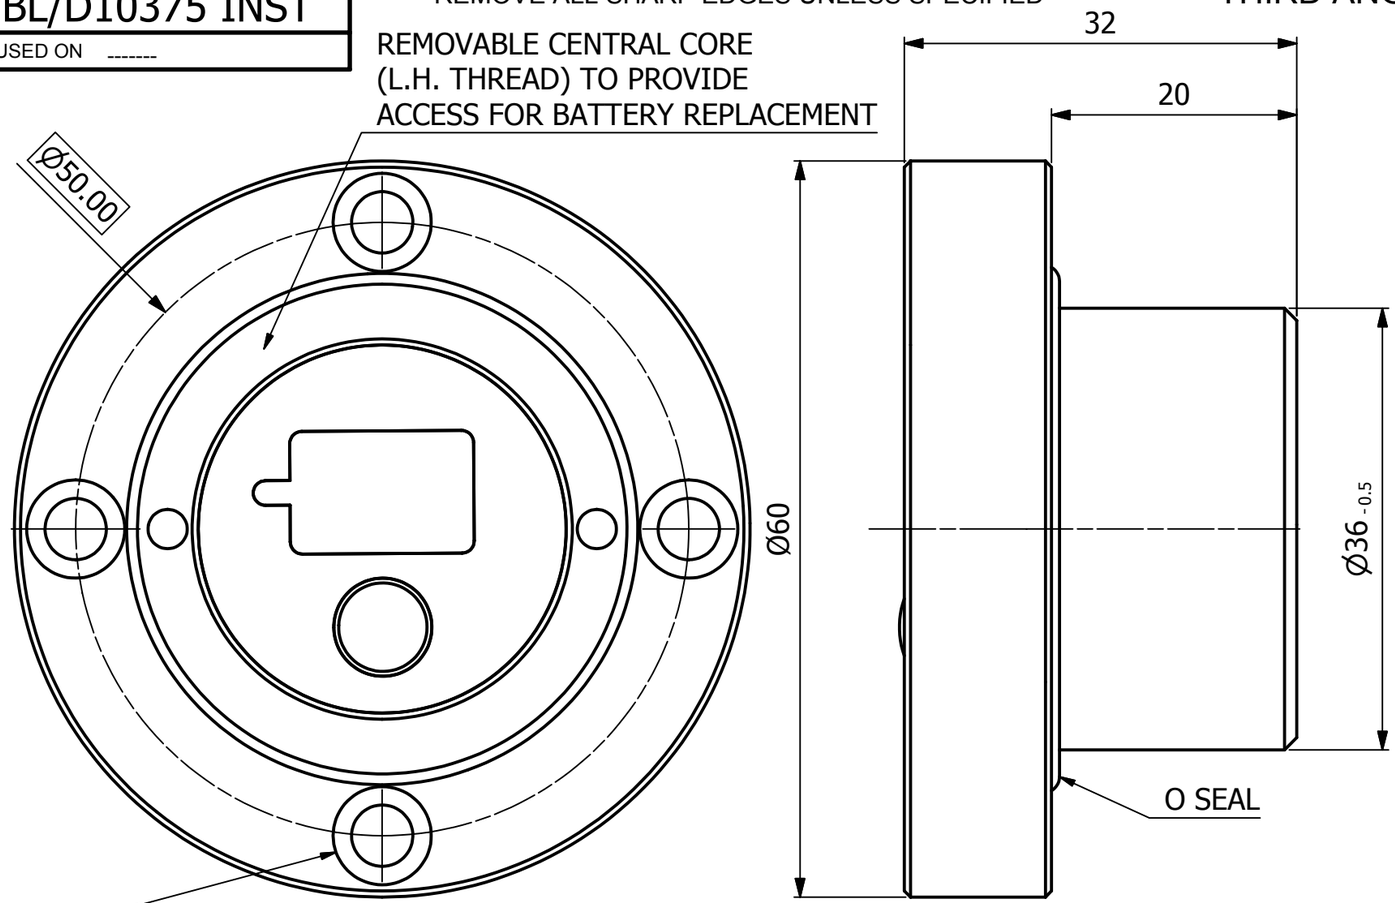

4 HOLES TO SUIT
M4 SOCKET HEAD CAP SCREWS
EQUISPACED

NOTES :-

INGRESS PROTECTION	:	IP67
OPERATING TEMPERATURE	:	0 to -30°C
STORAGE TEMPERATURE	:	-40°C to +80°C

POWER SOURCE	:	FLAT LITHIUM (COIN CELL) BATTERY
CHEMICAL SYSTEM	:	LITHIUM MANGANESE DIOXIDE
NOMINAL VOLTAGE	:	3 VOLTS
NOMINAL CAPACITY	:	150 mAh
ESTIMATED LIFE	:	5 YEARS (BATTERY)

AVAILABLE OPTIONS : RFI

DISPLAY SEQUENCE for one press of the button

1) RELATIVE HUMIDITY - %RH

2) TEMPERATURE - °C

3) DEWPOINT - °C

ORIGINAL		1	03-06-08
CHANGE	MOD No	ISSUE	DATE

MATERIAL: ALUMINIUM ALLOY	PROTECTIVE FINISH: ANODSIED & DYED BLACK	TOLERANCES UNLESS OTHERWISE STATED	±0.5	**BROWNELL Ltd. LONDON NW10 7XF**	RED DOT=ORIGINAL BLACK DOT=COPY	DRAWN: PK / CHECKED
		SURFACE ROUGHNESS	3.2µm (N8)	TITLE: ENVIROMENTAL INDICATOR - FLANGED	DRAWING NUMBER: BL/D10375 INST	
EST. WT. -----		DIMENSIONS IN in/mm	mm			
		SCALE (ORIGINAL)	2:1			