



DRG. No. SHT 2 OF 2  
BL/D 1462/10-18 INST

USED ON

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

THIRD ANGLE PROJECTION

DO NOT SCALE - ASK.

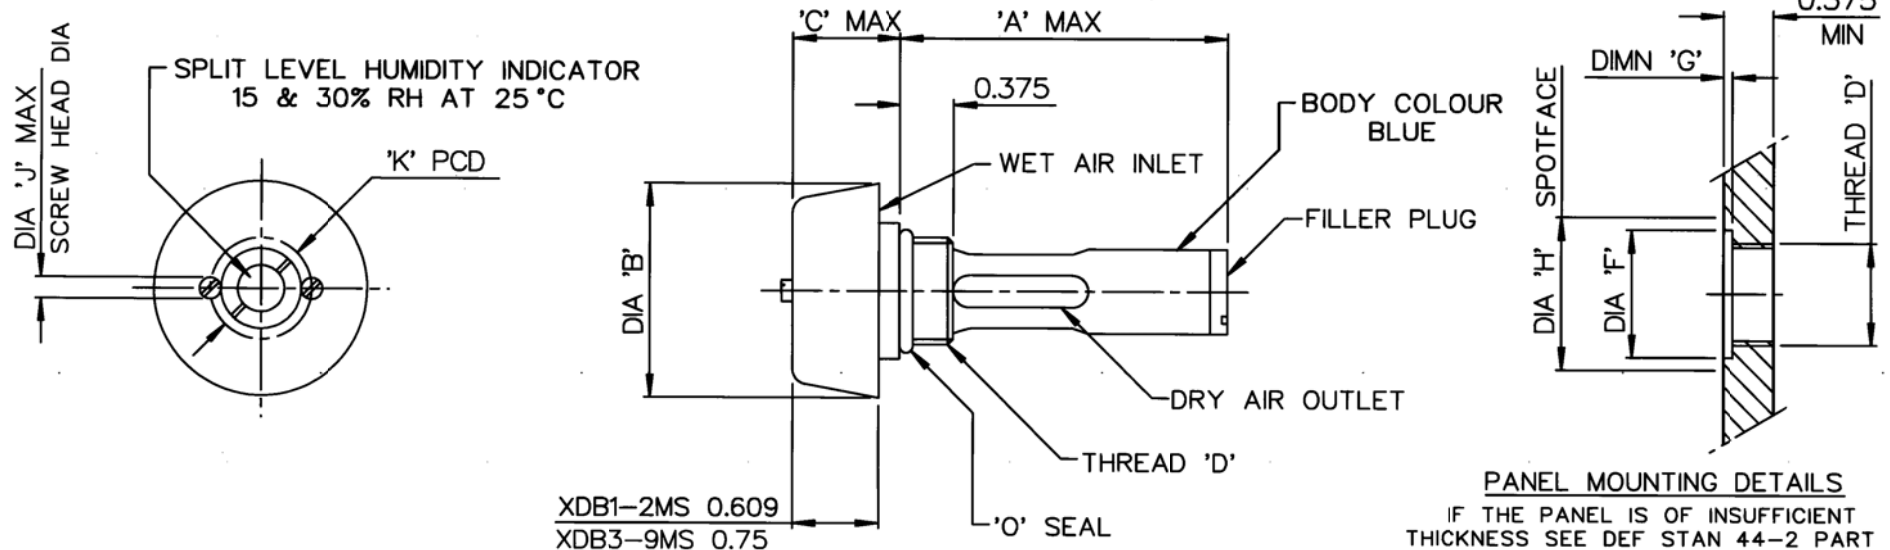

DRG No	NSN	STYLE	'A' MAX	DIA 'B'	'C' MAX	THREAD 'D'	NOMINAL CONTENTS	DIA 'F'	DIMN 'G'	DIA 'H'	DIA 'J' MAX	'K' PCD
BL/D1462/10	4440-99-657-8982	XDB1MS	2.407	1.50	0.766	0.75 UNEF	5 GRM	0.937	0.074	1.125	0.158	0.750
BL/D1462/11	4440-99-755-3356	XDB2MS	4.407	1.50	0.766	0.75 UNEF	10 GRM	0.937	0.074	1.125	0.158	0.750
BL/D1462/12	4440-99-652-1079	XDB3MS	2.094	2.187	1.016	1.25x20 UN	20 GRM	1.450	0.074	1.625	0.194	1.125
BL/D1462/13	4440-99-718-6179	XDB4MS	4.094	2.187	1.016	1.25x20 UN	40 GRM	1.450	0.074	1.625	0.194	1.125
BL/D1462/14		XDB5MS	4.032	2.437	1.016	1.5x20 UN	60 GRM	N.A.	N.A.	2.00	0.194	1.600
BL/D1462/15		XDB6MS	7.532	2.437	1.016	1.5x20 UN	100 GRM	N.A.	N.A.	2.00	0.194	1.600
BL/D1462/16		XDB7MS	8.532	3.00	1.016	2.0x20 UN	200 GRM	N.A.	N.A.	2.50	0.252	1.750
BL/D1462/17		XDB8MS	12.532	3.00	1.016	2.0x20 UN	300 GRM	N.A.	N.A.	2.50	0.252	1.750
BL/D1462/18		XDB9MS	13.532	3.50	1.016	2.25x20 UN	400 GRM	N.A.	N.A.	3.00	0.252	2.000

NOTES

1. FILLED WITH BEADED MOLECULAR SIEVES DESICCANT, SPEC. BS7444.
2. CONFORMS TO DEF STAN 44-2.
3. PACKAGED FOR A SHELF LIFE OF 5 YEARS WHEN STORED IN TEMPERATE CONDITIONS.
4. SEE SHEET 1 FOR BL/D1462/1-9 (XDB1-9).

REDRAWN	4076	18	4/3/92
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL	PROTECTIVE TREATMENT	TOLERANCES UNLESS STATED	±0.015	BROWNELL LTD. LONDON, N.W.10.	CUSTOMERS REF.	DRAWN LJ	CHECKED
ALUM ALLOY	ANODISED	DIMNS. IN IN/1000		TITLE	DRAWING No.	SHT 2 OF 2 SHTS	
EST. WT.		SCALE (ORIGINAL)	N.T.S	DESICCANT CONTAINER DEHUMIDIFIER (BREATHUR TUBE)	BL/D 1462/10-18 INST		

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.