




THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.

DRG. No.
BL/D 3842/1-2 INST
USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DO NOT SCALE - ASK.

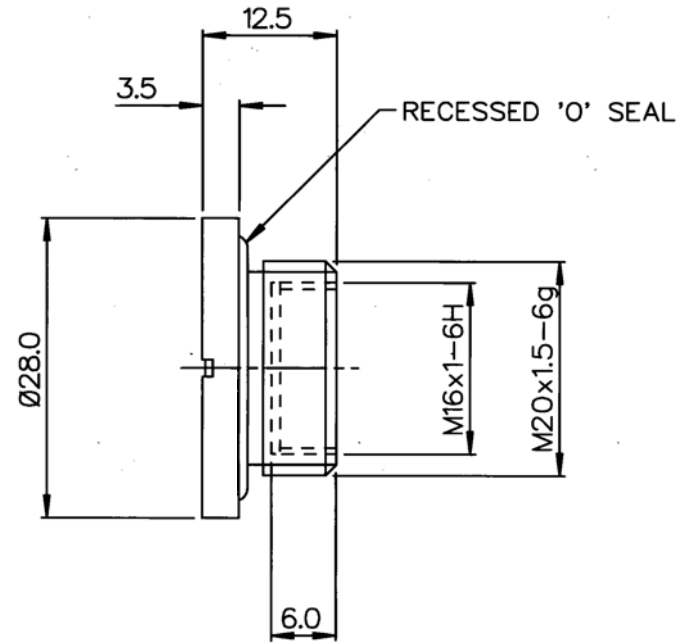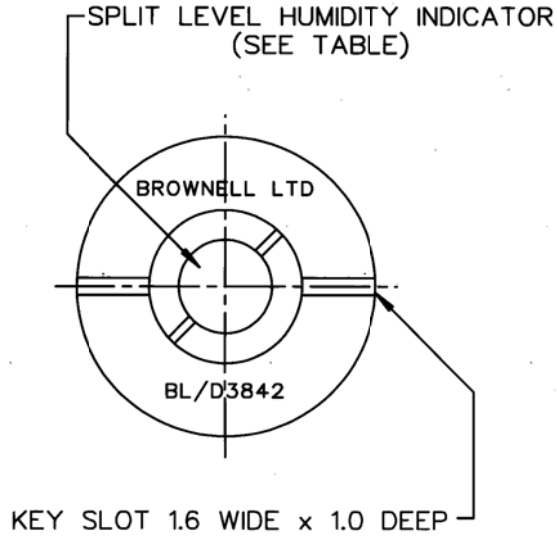

DRG No	NSN	INDICATOR LEVELS AT 25 °C
BL/D3842/1		15 & 30% RH
BL/D3842/2	6685-99-574-0733	30 & 50% RH

NOTES

1. CONFORMS TO DEF STAN 66-14 (SEALING - TEST No 14.3 PRESSURE DIFFERENTIAL TO BE 5.0±0.5 PSI).
2. INTERNAL THREAD TO FIT TUBULAR DESICCATORS BL/D2713 OR BL/D3159.
3. PACKAGED FOR A SHELF LIFE OF 5 YEARS WHEN STORED IN TEMPERATE CONDITIONS.

REDRAWN	4078	6	9/3/92
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL ALUM ALLOY	PROTECTIVE TREATMENT ANODISED	TOLERANCES UNLESS STATED	±0.25	BROWNELL LTD. LONDON, N.W.10.	CUSTOMERS REF.	DRAWN LJ	CHECKED KS
		DIMNS. IN mm /m.m.				TITLE INDICATOR HUMIDITY PLUG	DRAWING No. BL/D 3842/1-2 INST
EST. WT.		SCALE (ORIGINAL) 2 : 1					