



THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.

DRG. No.	
BL/D 4123/1-3 INST	
USED ON	
ISSUE	ALTERATION
A	31.7.84
B	PRESS. & FILTRATION LEVEL CHANGED. MOD. No. 4043. 6.12.91

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DO NOT SCALE - ASK.

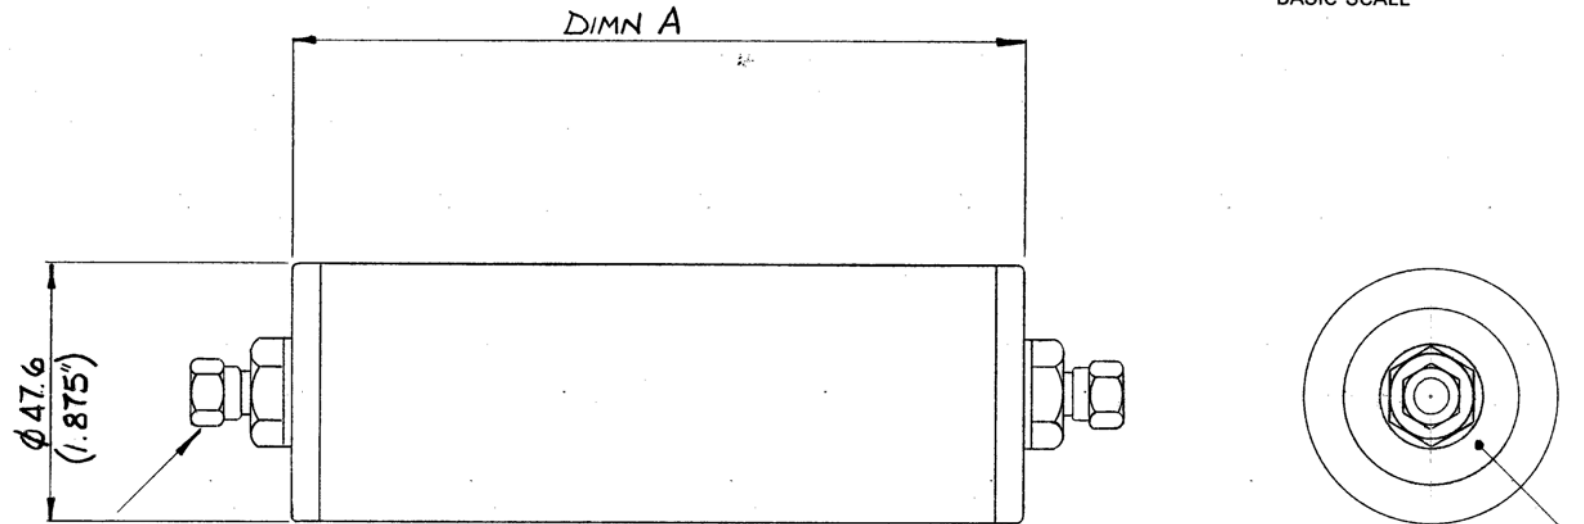

BRASS COUPLING TO SUIT 1/4" DIA PIPE

PERSPEX HEAD TO VIEW HUMIDITY INDICATOR WHICH CEASES TO BE BLUE AT APPROX -10°C DEWPOINT. WHEN HUMIDITY INDICATOR CEASES TO BE BLUE RECHARGE UNIT FROM INLET END.

DRG No.	DIMN A	NOMINAL CAPACITY	REFILL DRG No.	APPROX LIFE AT SPEC. LEVELS
BL/D 4123/1	85.0	60g	BL/D 2771/5	4.5 HRS
BL/D 4123/2	115.0	100g	BL/D 2771/6	7.5 HRS
BL/D 4123/3	215.0	200g	BL/D 2771/7	15 HRS

SPECIFICATION

DESICCANT-MOLECULAR SIEVES TYPE 4A
 MAX. FLOWRATE — 4 LITRES/MIN
 MAX. PRESSURE — 60 PSI (4 BAR)
 OUTLET FILTER — 25 MICRONS (NOMINAL)
 INLET AIR MUST BE CLEAN & FREE FROM LIQUID WATER

MATERIAL ALUM ALLOY	PROTECTIVE TREATMENT ANODISED	TOLERANCES UNLESS STATED	±1.0	BROWNELL LTD. LONDON, N.W.10.		CUSTOMERS REF.	DRAWN	CHECKED
		DIMNS. IN INS /m.m.		TITLE	DRAWING No.	ES		
EST. WT. —		SCALE (ORIGINAL) —		PIPE LINE DRYER		BL/D 4123/1-3 INST		