



THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.

DRG. No.
BL/D5107 INST
USED ON

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

THIRD ANGLE PROJECTION

DO NOT SCALE - ASK.

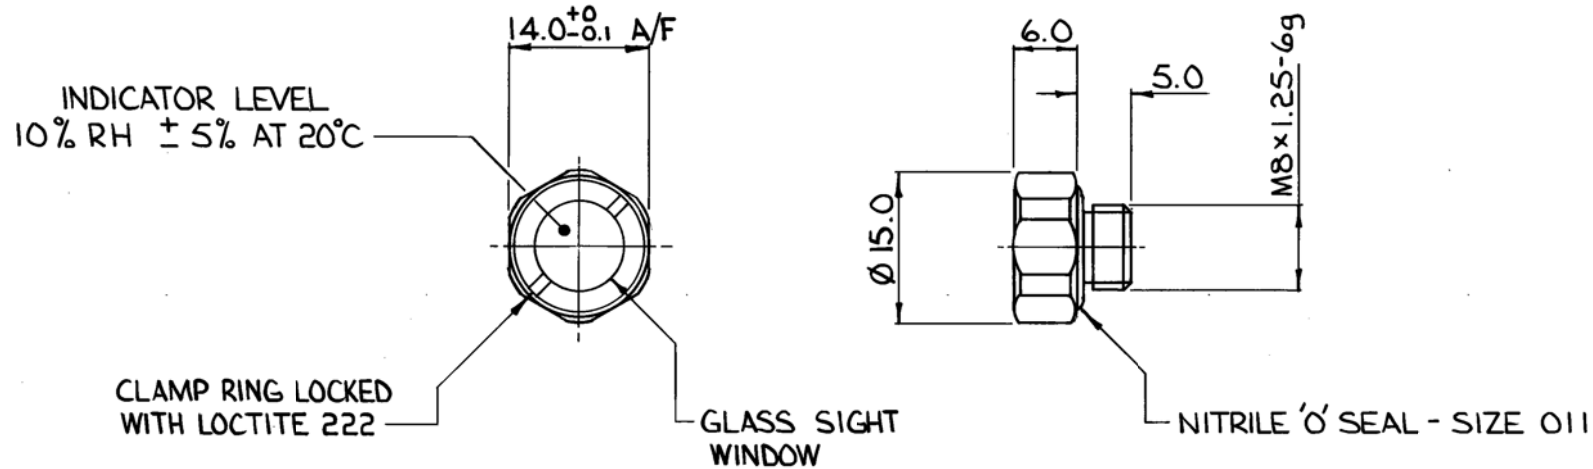

SPECIFICATIONS

CONFORMS TO DEF. STAN 66-14 WHERE APPLICABLE AND THE FOLLOWING:

1. TEMPERATURE RANGE -40°C MINIMUM TO +90°C MAXIMUM.
2. VIBRATION TO BS2011 PART 2.1 - FREQUENCY 10 Hz TO 2 KHz FOR 6 HOURS, 0.75 mm AMPLITUDE.
3. MAXIMUM LEAK RATE 1 cc/HOUR AT 5 PSI.
4. MAXIMUM PRESSURE 10 PSI.

FINISH ADDED	3653	D	12.4.89
UPDATED	3632	C	23.2.89
REDRAWN	3592	B	18.1.89
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL STAINLESS STEEL BS 303	PROTECTIVE TREATMENT EBONOL SS52 BLACK-MATT OR SEMI-MATT	TOLERANCES UNLESS STATED	± 0.5	BROWNELL LTD. LONDON, N.W.10.	CUSTOMERS REF.	DRAWN JA	CHECKED
		DIMNS. IN mm /m.m.			TITLE HUMIDITY INDICATOR	DRAWING No. BL/D5107 INST	
EST. WT. —		SCALE (ORIGINAL)	2/1				