


DRG.No.  
BL/D5267 INST  
USED ON BL/

**THIRD ANGLE PROJECTION**  
THIS DESIGN IS THE PROPERTY OF BROWNELL LTD AND MAY NOT  
BE REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

**DO NOT SCALE - ASK**

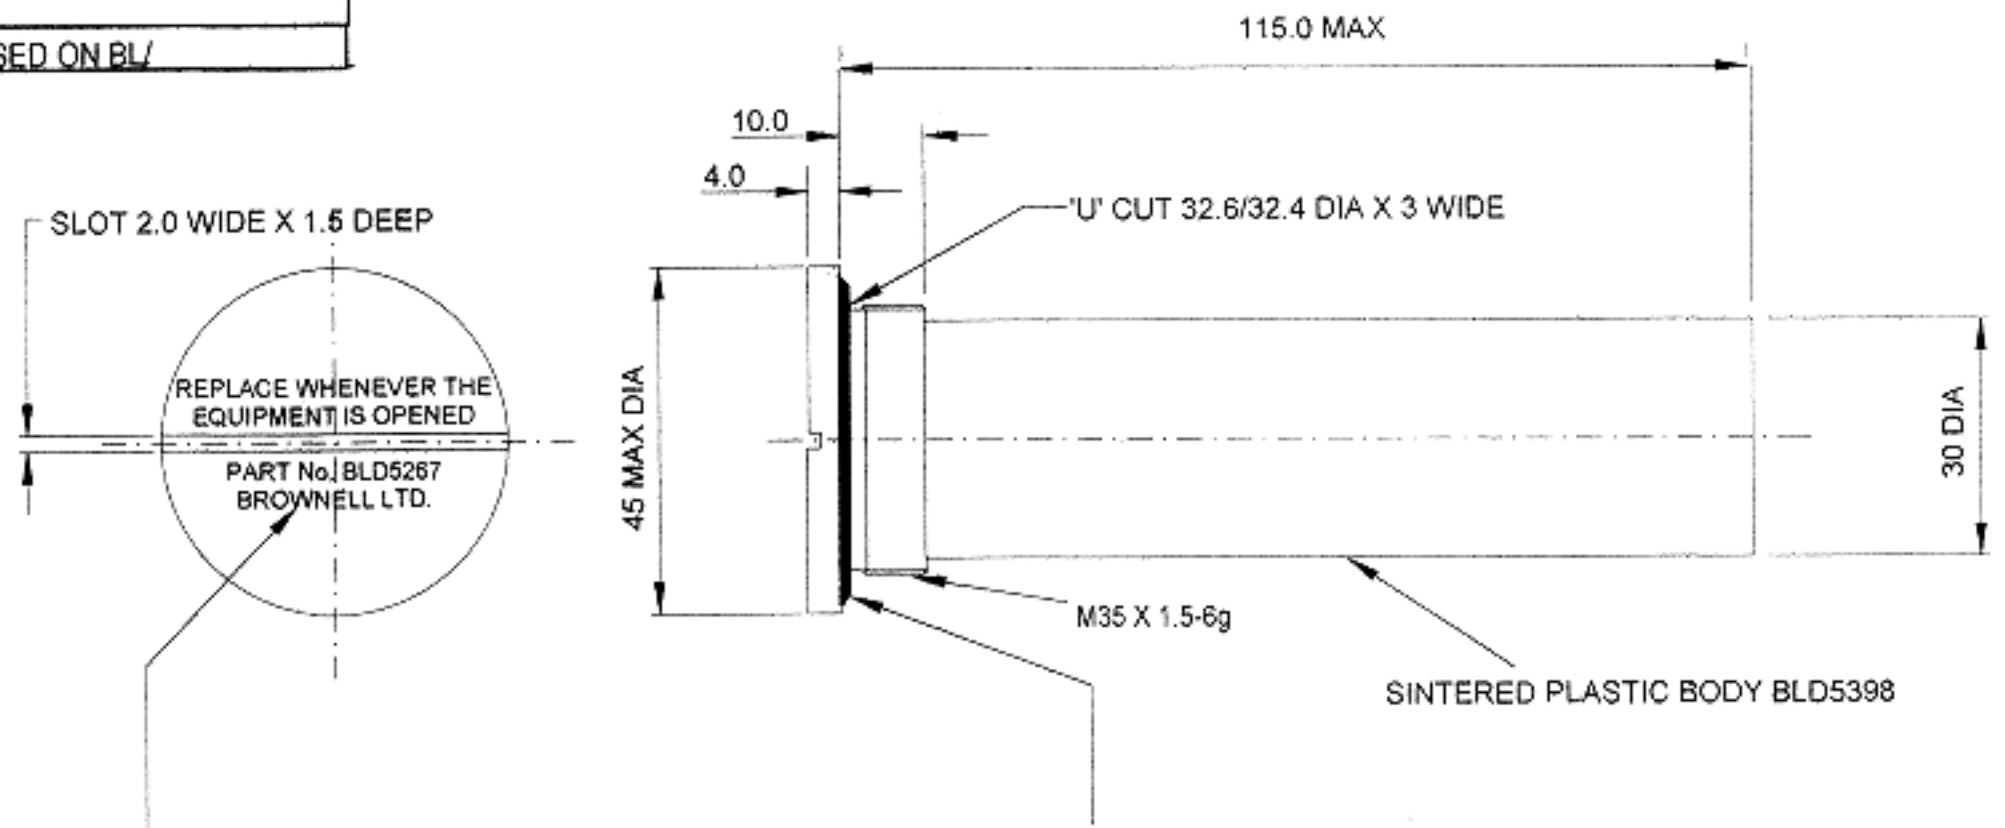

2.0 HIGH CHARACTERS PRINTED IN WHITE

SILICONE RUBBER PANEL SEAL

- NOTES:
1. THE UNIT CONTAINS APPROX. 45G BEADED MOLECULAR SIEVES DESICCANT GRADE 4A BS7444
  2. THE UNITS ARE PACKED IN PAIRS IN MFL FOR A SHELF LIFE OF 5 YEARS IN TEMPERATE CONDITIONS
  3. UNIT CONFIRMS TO DEFSTAN 44-2 WHERE APPLICABLE

LAYOUT CHANGED	5889	D	14-1-02
REDRAWN	5884	C	18-12-01
45 MAX WAS 48 MAX	3756	B	18-10-89
ORIGINAL		A	25-8-89

MATERIAL ALUMINIUM ALLOY	PROTECTIVE TREATMENT ANODISE & DYE BLACK	TOLERANCES	BROWNELL LTD.LONDON.NW10	CHANGE	MOD.No	ISSUE	DATE
		EST.WT.	TITLE	DRAWN	NGH	CHECKED	GGH
		DIMNS. IN MM.	DESICCANT CONTAINER DEHUMIDIFIER (PANEL MOUNTING)	DRAWING No.			
		SCALE		BL/D5267 INST			