


### Product Data

- Moisture Adsorbing board is available as a standard sheet size of 295 x 205 x 1.6mm. Part No: BL/D8862.
- The standard operational temperature range is -40°C to +70°C.
- For calculating the quantity of moisture board required, the typical adsorption value is 0.025 grams per cm<sup>2</sup>.
- Moisture Adsorbing board is manufactured from polyolefin plastic with active silica gel desiccant absorbent.

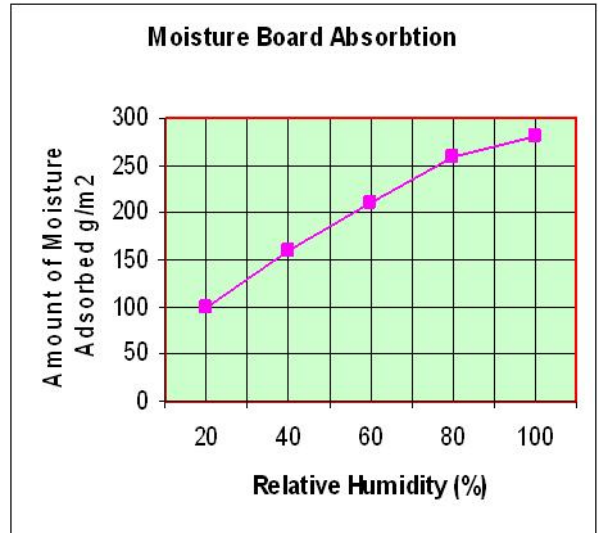

### Main Features

- Can be cut or punched to produce specific shapes or sizes.
- 3D thermo forming is possible.
- Uniform in thickness and easy to pack.
- No loose desiccants due to broken bags.
- Suitable for automatic filling in packing process.
- Not water-soluble, corrosive or deliquescent.
- Easily fixed by mechanical retention.
- No dust produced as it is contained in a plastic sheet.
- Moderate to long term hygroscopicity.
- Printable sheet surface.



This data is supplied for information purposes only and is subject to change without prior notification.

Please contact Brownell Limited for any further information or guidance required.

Tel: 020 8965 9281

Fax: 020 8965 3239

E-mail: [info@brownell.co.uk](mailto:info@brownell.co.uk)