


DRG No
BL/D9382/01-02 INST
USED ON

THIRD ANGLE PROJECTION

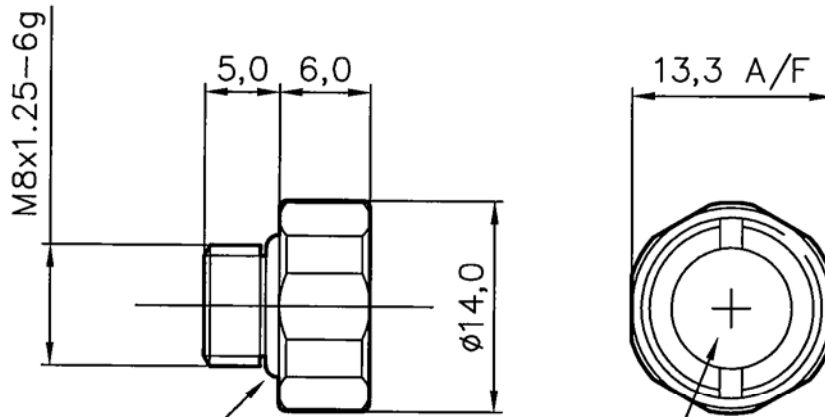

FLOUROSILICONE 'O' SEAL
MIL-R-25988
TYPE II, CLASS I, GRADE 60


SPLIT LEVEL INDICATOR
SEE TABLE

DRAWING No.	INDICATOR LEVELS AT 25°C
BL/D9382/01	15 & 30% RH
BL/D9382/02	30 & 50% RH

NOTES

1. CONFORMS TO DEF STAN 66-44 WHERE APPLICABLE.
2. INDICATOR PRESSURE TESTED AT 14 PSI.
3. R.F. ATTENUATION.

MATERIAL STAINLESS STEEL BS970 316S16	PROTECTIVE FINISH PAINT NATO GREEN	ORIGINAL	1	06-08-03
		CHANGE	MOD No	ISSUE
EST. WT. _____	SURFACE ROUGHNESS _____	TOLERANCES ± 0.5		
DIMS IN MM	_____			
SCALE 2:1	_____			



BROWNELL LTD
LONDON NW10 7XF

DRAWN
PK

CHECKED
[Signature]

TITLE R.F. SCREENED HUMIDITY INDICATOR

DRAWING No. BL/D9382/01-02 INST

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD, AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION