



Graph 1 – Rate of Adsorption (% weight)

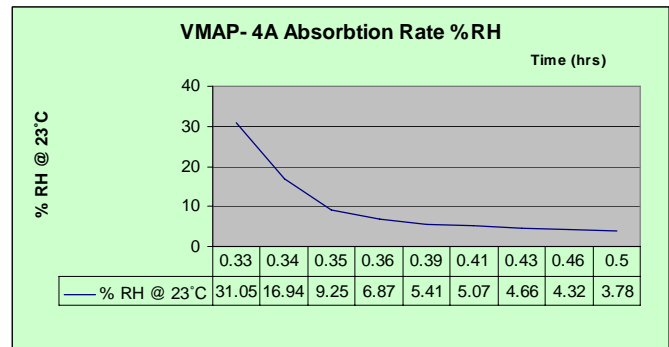

Graph 2 – Rate of Adsorption (% RH @ 23°C)

Main Features

- Can moulded and machined to produce specific shapes.
- Ideal for both low and high production quantities.
- Low cost prototypes.
- Easily fixed by mechanical retention or adhesive.
- High adsorption capacity.
- Low dusting and particle loss.
- Wide operating temperature range.
- Can be reactivated.

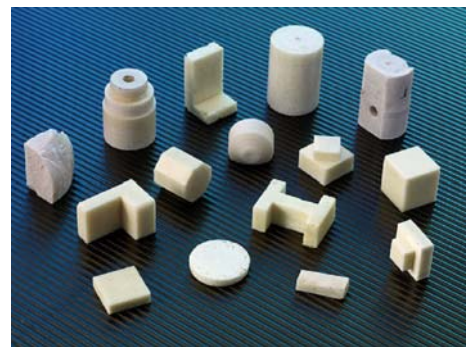

This data is supplied for information purposes only and is subject to change without prior notification.

Please contact Brownell Limited for any further information or guidance required.

Tel: 020 8965 9281

Fax: 020 8965 3239

E-mail: info@brownell.co.uk