DRG No
BL/D4318/01-10 INST
USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

DO NOT SCALE – ASK

0 5 10 20 30 40 50 60 70 mm
0 0.5 1 2 3 INS
BASIC SCALE

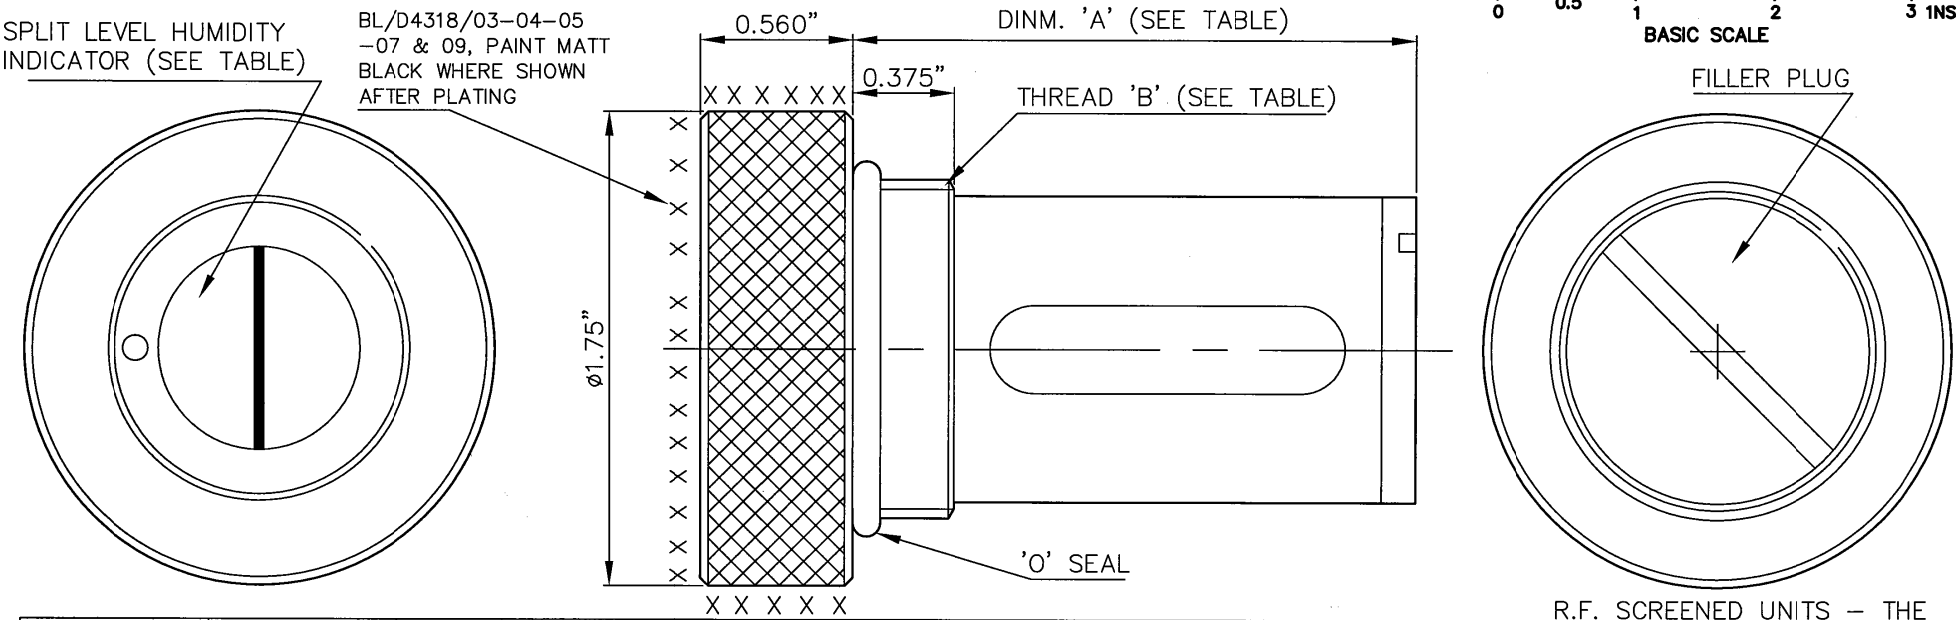

DRG. No.	LENGTH 'A' INS OR MM	THREAD 'B'	BEADED DESICCANT	NOMINAL CONTENTS	INDICATOR LEVELS	R.F. SCREEN	N.S.N. 4440-99-
BL/D4318/01	2.084"	1.25x20UN	SILICA GEL	20 GRMS	30/50%R.H.	NO	
BL/D4318/02	2.084"	M32x1.5-6g	SILICA GEL	20 GRMS	30/50%R.H.	NO	535-4337
BL/D4318/03	2.084"	M32x1.5-6g	MOLSIEVES	20 GRMS	15/30%R.H.	YES **	
BL/D4318/04	2.084"	M32x1.5-6g	SILICA GEL	20 GRMS	30/50%R.H.	YES **	252-6352
BL/D4318/05	2.084"	1.25x20UN	SILICA GEL	20 GRMS	30/50%R.H.	YES **	
BL/D4318/06	106 MM	M32x1.5-6g	SILICA GEL	40 GRMS	30/50%R.H.	NO	
BL/D4318/07	106 MM	M32x1.5-6g	SILICA GEL	40 GRMS	30/50%R.H.	YES **	
BL/D4318/08	106 MM	M32x1.5-6g	MOLSIEVES	40 GRMS	15/30%R.H.	NO	
BL/D4318/09	106 MM	M32x1.5-6g	MOLSIEVES	40 GRMS	15/30%R.H.	YES **	
BL/D4318/10	2.084"	M32x1.5-6g	SILICA GEL	20 GRMS	NONE	NO	

NOTE :- THE TERM 'MOLSIEVES' IN THE ABOVE TABLE REFERS TO GRADE 4A 1-3MM MOLECULAR SIEVES TO BS7444. – THE SILICA GEL DESICCANT CONFORMS TO BS7554

R.F. SCREENED UNITS – THE MOUNTING THREAD IS ELECTROLESS NICKLE FOR R.F. CONTINUITY. SURFACES MARKED THUS *** TO BE PAINTED MATT BLACK AFTER PLATING.

EACH ITEM IS PACKAGED FOR A TEMPERATE SHELF LIFE OF 5 YEARS OR FOR 3 YEARS TROPICAL STORAGE.

CHANGE	MOD No	ISSUE	DATE
	6154	6	03-06-05
/10 ADDED	6115	5	15-09-04
	5791	4	28-04-01

MATERIAL ALUMINIUM ALLOY

EST. WT. ——

PROTECTIVE FINISH ANODISED (EXCEPT WHERE STATED)

TOLERANCES ——

DIMENSIONS IN in/mm INS & MM

SURFACE ROUGHNESS ——

SCALE (ORIGINAL) 2:1

BROWNELL Ltd. LONDON NW10 7XF

TITLE DESICCANT CONTAINER DEHUMIDIFIER (PANEL MOUNTING)

RED DOT=ORIGINAL BLACK DOT=COPY

DRAWN PK

CHECKED

DRAWING NUMBER BL/D4318/01-10 INST

THIS DRAWING IS THE PROPERTY OF BROWNELL LTD.AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION